



## Cubic Bollard

Pathway Lighting

Bollard 680 mm high with anti-glare light emission, designed for use in pedestrian circulation, commercial areas, hospital projects, etc.

### Built in Wireless Control!

Can be wirelessly controlled through INGY, Meshle, Casambi, or Bluetooth and others without the need for a field mounted device.

### Certifications:



### Warranty:

5 Years

### General Technical Data

|                                 |                              |
|---------------------------------|------------------------------|
| Light Source                    | Built-in LED                 |
| Nominal luminous flux (lm)      | 220                          |
| System Efficacy (lm/W)          | >24                          |
| CCT                             | 4000K                        |
| CRI                             | 70                           |
| Beam Angle                      | 65°                          |
| Power                           | 9W                           |
| Input Voltage                   | 127-220V~                    |
| Input Frequency                 | 60 Hz                        |
| Power Factor                    | >0.85                        |
| Total Harmonic Distortion (THD) | <10%                         |
| Operating Temperature           | -10 to 40° C                 |
| Driver                          | Integrated                   |
| Control                         | Wireless, integrated control |
| Lifespan/LED Maintenance        | 25,000 L70                   |
| Housing                         | ALUMINUM                     |
| Lens Material                   | PMMA (Acrylic)               |
| Finish                          | Electrostatic Painting       |
| Color                           | Grey                         |
| IP                              | 65                           |
| IK                              | 05                           |
| Mounting Type                   | Surface mounting             |

### Order Information

|               |                 |
|---------------|-----------------|
| Application   | UU              |
| Consec.       | 9047            |
| Color         | G - Grey        |
| CCT           | BN - 4000K      |
| Input Voltage | A - 127 - 220V~ |

Code construction example: UU 9047 G BN

## Energy Efficiency:

|                            |                |
|----------------------------|----------------|
| Code                       | UU 9047 G BN B |
| Nominal Luminous Flux (lm) | 219            |
| Power (W)                  | 8              |
| System Efficacy (lm/W)     | 27.76          |


|                            |                |
|----------------------------|----------------|
| Code                       | UN 4955 B BF A |
| Nominal Luminous Flux (lm) | 10,292         |
| Power (W)                  | 87.40          |
| System Efficacy (lm/W)     | 112.26         |

## Input Current:

|               |              |
|---------------|--------------|
| Power (W)     | 8            |
| Input Current | 0.07-0.041 A |


|               |                 |
|---------------|-----------------|
| Power (W)     | 87.40           |
| Input Current | 0.701 - 0.327 A |

## Photometric:

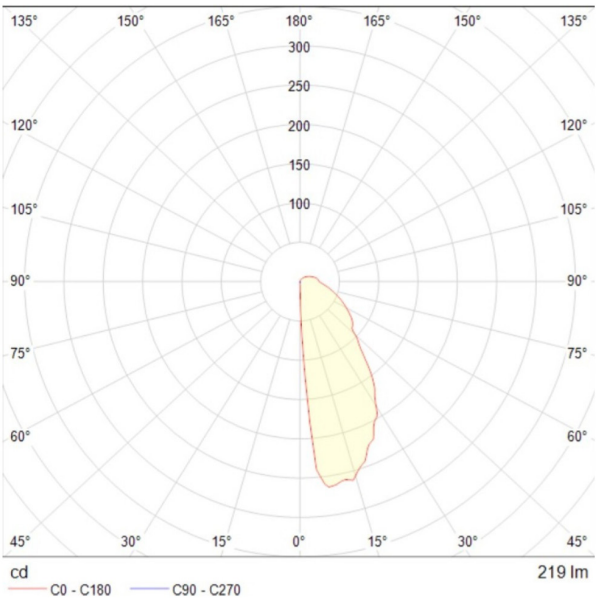

Cubic bolardo 65°

## Dimensions:

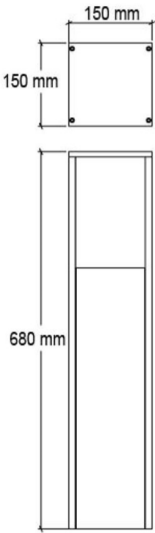

Cubic bolardo 9W