

Downled

General Lighting

General down lights for overhead installation, manufactured in aluminum injection, finished with electrostatic paint of high reflectance white finish and a high transmittance acrylic screen.

Built in Wireless Control!

Can be controlled through INGY, Meshle, Casambi, or Bluetooth and others without the need for a field mounted device.



General Technical Data

Light Source	Built-in LED
Nominal luminous flux (lm)	750
System Efficacy (lm/W)	94
CCT	3000K/4000K
CRI	80
Beam Angle	120°
Power	8W
Input Voltage	127V~
Input Frequency	50Hz/60 Hz
Power Factor	>0.9
Total Harmonic Distortion (THD)	<10%
Operating Temperature	-10° to 40° C
Driver	Integrated
Control	Integrated, wireless control
Lifespan/LED Maintenance	30,000h L70
Housing	Aluminum
Lens Material	Acrylic
Finish	Electrostatic Painting
Color	White/Black
IP	10
IK	02
Mounting Type	Surface

Certifications:



Warranty:

5 Years

Order Information

Application	Consec.	Color	CCT	Input Voltage
UF	4023	B- WHITE	BC- 3000K BN- 4000K	D-127V~

Power	Nominal Luminous Flux	CRI	Control	Beam Angle
8W	750	80	Wireless integration	120


Energy Efficiency

Code	Nominal Luminous Flux (lm)	Power (W)	System Efficacy (lm/W)
UF 4023 B BC D	756	8	94
UF 4023 B BN D	756	8	94

Input Current


Power (W)	Input Current
8	0.073A
8	0.073A

Photometric:

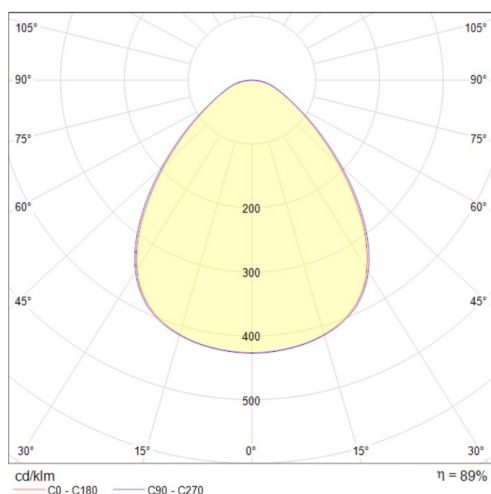

Downled 120°

Product dimensions:

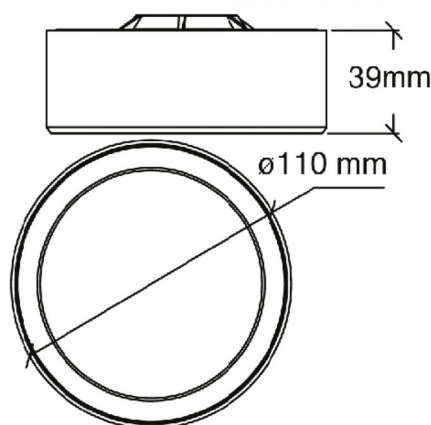

Downled 8W