



Performa Pro

High Power Downlight

A unique down light solution for general Lighting with up to up to 100W of power. Offering lighting levels for double or triple height. With built in wireless control and an integrated optical design based on a specular aluminum reflector that favors the control of the light.

Built in Wireless Control!

Can be controlled through INGY, Meshle, Casambi, or Bluetooth and others without the need for a field mounted device.

Certifications:



Warranty:

5 Years

Order Information

Application	UO
Consec.	1200
Color	B - White
CCT	BC - 3000K BN - 4000K BF - 5000K
Input Voltage	A - 127 - 277V~

Code construction example: UO 1200 B BC A

Energy Efficiency:

Code	UO 1200 B BC A UO 1200 B BN A UO 1200 B BF A
Nominal Luminous Flux (lm)	3,815
Power (W)	40
System Efficacy (lm/W)	95.37


Input Current:

Power (W)	40.00
Input Current	0.292 - 0.137 A

General Technical Data

Light Source	Built-in LED
Nominal luminous flux (lm)	4,000
System Efficacy (lm/W)	>85
CCT	3000K/ 4000K/ 5000K
CRI	80
Beam Angle	60°
Power	40W
Input Voltage	127-277V~
Input Frequency	60 Hz
Power Factor	>0.90
Total Harmonic Distortion (THD)	<10%
Operating Temperature	-10 to 40° C
Driver	Integrated
Control	Integrated, wireless control
Lifespan/LED Maintenance	50,000h L70
Housing	Aluminum
Lens Material	PMMA (Acrylic)
Color	White
IP	4X
IK	04
Mounting Type	Surface/ Recessed

Photometric:

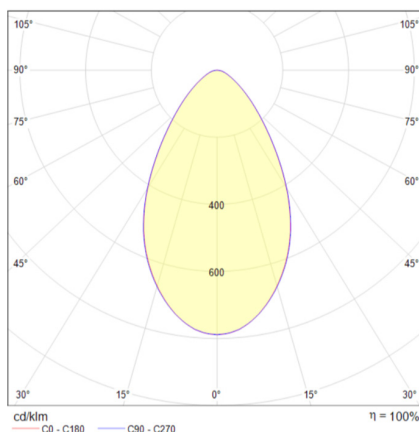

Dimensions:

