



Slim

Linear Lighting

Slim is the perfect lighting solution for spaces that need uniform and versatile illumination. This linear luminaire is designed for quick and easy installation, thanks to its mechanical/electrical interconnectable system, available in two different sizes: 2ft and 4ft. This makes Slim an ideal choice for a wide variety of spaces, from small offices to commercial spaces. It is the perfect solution for any space that needs uniform, efficient and versatile lighting.

Interconnectable System!

A mechanical and electrical interconnection system makes installation quick and easy, in 2ft and 4ft nominal sizes.



Certifications:

Warranty:
5 Years



General Technical Data

Light Source	Built-in LED
Nominal luminous flux (lm)	2,600 - 5,850
System Efficacy (lm/W)	>130
CCT	3000K/4000K
CRI	80
Beam Angle	120°
Power	20W/36W/45W
Input Voltage	127-277V~
Input Frequency	50/60 Hz
Power Factor	>0.90
Total Harmonic Distortion (THD)	<10%
Operating Temperature	-10° to 40° C
Driver	Integrated
Control	0-10V
Lifespan/LED Maintenance	50,000h L70
Housing	Aluminium
Lens Material	Polycarbonate PC
Finish	Electrostatic painting
Color	White
IP	10
IK	04
Mounting Type	Surface/Recessed/Suspended

Order Information

UF	_____	B	BN	A
----	-------	---	----	---

Application	Color	CCT	Input Voltage	CRI	Control
UF	B- White	BN- 4000K	A- 127-277V~	80	0-10V

Code construction example: UF 1052 B BN A

Consec.	Power	Nominal Luminous Flux (lm)	Dimensions	Installation
1052	36W	4,700	51 x 51 x 1140 mm	Recessed
1053	45W	5,850	51 x 51 x 2372 mm	Recessed
4047	25W	2,600	51 x 51 x 680 mm	Surface
4048	36W	4,700	51 x 51 x 1140 mm	Surface
4049	45W	5,850	51 x 51 x 2372 mm	Surface
8021	25W	2,600	51 x 51 x 680 mm	Suspended
8022	36W	4,700	51 x 51 x 1140 mm	Suspended
8056	45W	5,850	51 x 51 x 2372 mm	Suspended


Energy Efficiency

Code	Nominal Luminous Flux (lm)	Power (W)	System Efficacy (lm/W)
UF 1052 B BN A	4,680	36	130
UF 1053 B BN A	5,850	45	130
UF 4047 B BN A	2,600	25	104
UF 4048 B BN A	4,680	36	130
UF 4049 B BN A	5,850	45	130
UF 8021 B BN A	2,600	25	104
UF 8022 B BN A	4,680	36	130
UF 8056 B BN A	5,850	45	130

Input Current




Power (W)	Input Current
36	0.278 - 0.145 A
45	0.353 - 0.174 A
25	0.152 - 0.092 A
36	0.278 - 0.145 A
45	0.353 - 0.174 A
25	0.152 - 0.092 A
36	0.278 - 0.145 A
45	0.353 - 0.174 A

Photometric

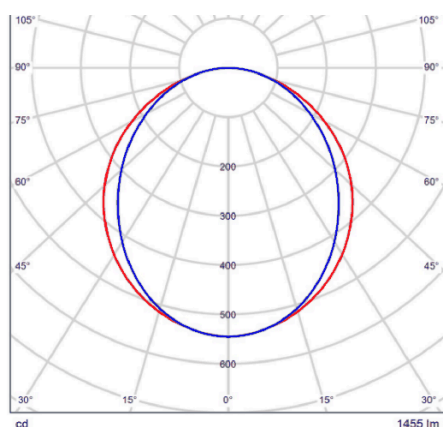


Slim 20W/ 36W/ 45W

Dimensions



Slim 2ft Recessed

Slim 4ft Recessed



Slim 2ft
Surface/Suspended

Slim 4ft
Surface/Suspended